



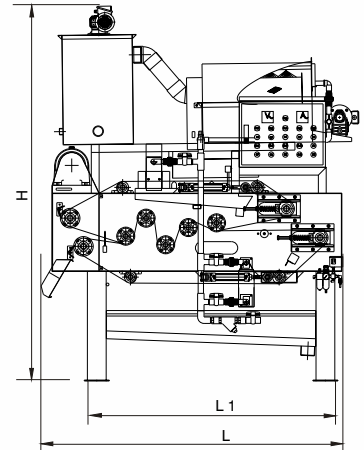

# ATA Series

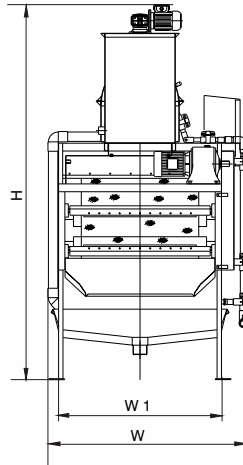


### ATA series external dimensions of belt presses

Model	External Dimensions (Reference) (m/m)			Reference Weight (kgs)
	L	W	H	
ATA-500	2150	1050	2420	630
ATA-750	2150	1300	2420	760
ATA-1000	2400	1550	2420	900
ATA-1250	2400	1800	2420	1100
ATA-1500	2400	2050	2420	1380
ATA-1500L	2700	2130	2460	1650
ATA-2000	3060	2700	2350	2050



ATA Series

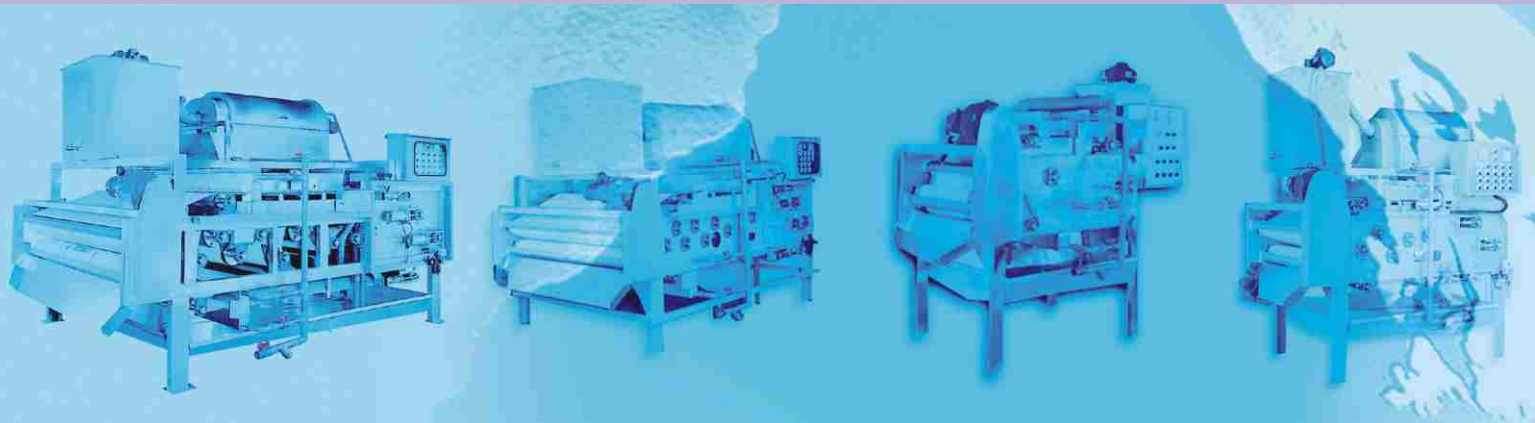

## ATA series technical data of belt presses

Model	Machine Frame Material	Structure Type	Cloth Width (mm)	Treating Capacity (depends on sludge feature) (SS 1.0 ~2.5%)		Power Consumption (Hp)							Lower Collecting Tray for Pressed Filtrate	Water Content's Rate (depends on sludge feature)
						Standard Accessories Motor Power(Hp)				Option Accessories Motor Power(Hp)				
						Wet Sludge (M <sup>3</sup> /hr)	Dried Sludge (Kg.ds/hr)	Driving Motor	Disposal Agitator Motor	Mud/Water Separator	Washing Pump (Fixed type) 60Hz (50)Hz	Washing Pump (Reciprocating Type)		
ATA-500	SUS304	Frame w/ Side plate	500	0.5~2.0	5~50	1/2 (Fixed Speed)	1/4	1/4	2 (3)	3	1/4x2	1/2	Yes	72~85
ATA-750	SUS304	Frame w/ Side plate	750	1.0~3.2	10~80	1/2 (Fixed Speed)	1/4	1/4	2 (3)	3	1/4x2	1/2	Yes	72~85
ATA-1000	SUS304	Frame w/ Side plate	1000	1.8~4.2	18~105	1/2 (Fixed Speed)	1/4	1/4	3 (3)	5+1	1/4x2	1/2	Yes	72~85
ATA-1250	SUS304	Frame w/ Side plate	1250	2.5~5.5	25~138	1/2 (Fixed Speed)	1/4	1/4	3 (3)	5+1	1/4x2	1/2	Yes	72~85
ATA-1500	SUS304	Frame w/ Side plate	1500	3.0~6.8	30~170	1/2 (Fixed Speed)	1/4	1/4	3 (7 1/2)	5+1	1/4x2	1/2	Yes	72~85
ATA-1500L	SUS304 or S20C	Frame w/ Side plate	1500	4.8~9.0	48~225	1/2 (Speed Variable)	1/4	1/4	3 (7 1/2)	5+1	1/4x2	1/2	Yes	72~85
ATA-2000	SUS304 or S20C	Frame w/ Side plate	2000	7.0~13	70~325	1/2 (Speed Variable)	1/2	1/2	7 1/2 (7 1/2)	5+1	1/2x2	1/2	No	72~85

**Remark:**

- ※The manufacture will reserve the right of the above specification.
- ※For example: ATA-100G is high-pressure reciprocating type belt press.